



Rear Wheel Assembly for RoughRider Wheelchair with Quick Release



1. While depressing the large black button: put the axle completely through the hub and then place one large spacer on the axle so that the spacer goes between the wheel and the frame.

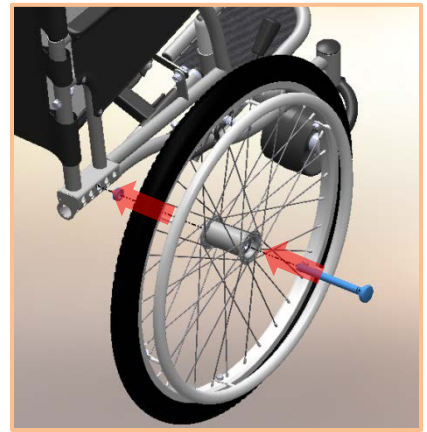

2. Put the axle through the desired axle hole, making sure that left and right wheels are mounted in the same position.

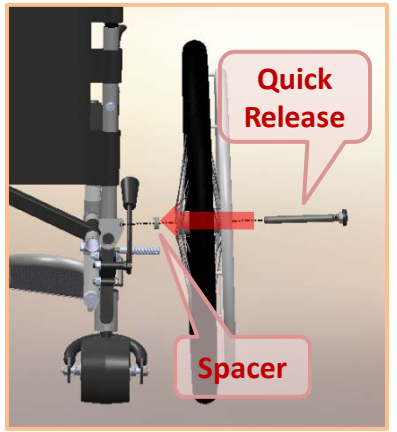

3. Make sure the quick release detente (ball) passes completely through the axle block so that the axle will not slide out unintentionally. Release the black button and the axle will be locked in place.

